
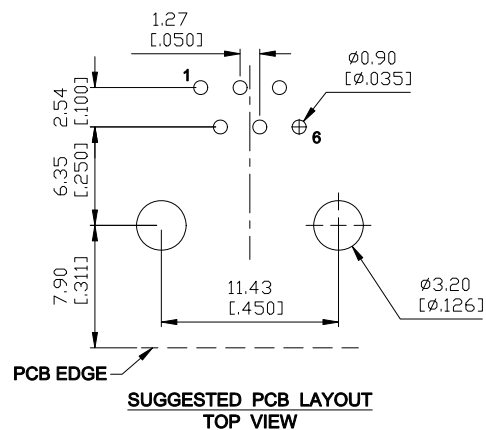
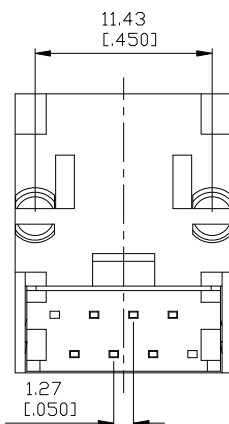
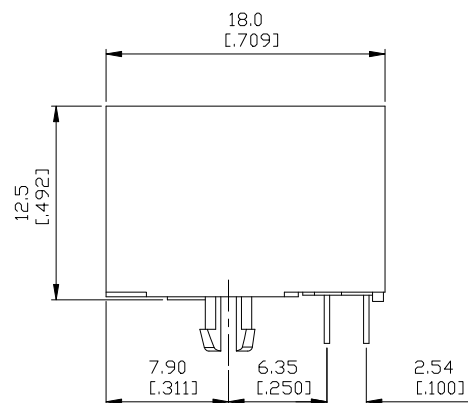


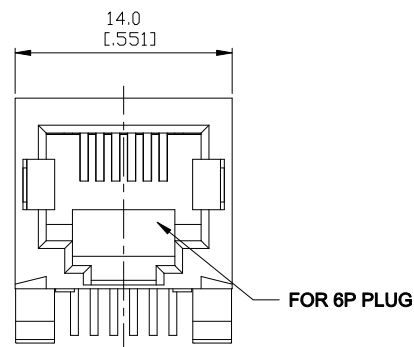

Electrical Characteristics :
 Insulation Resistance : 500MΩ Min.
 Contact Resistance : 50mΩ Max.
 Withstand Voltage : 1000 VAC 1 minute.
 Current Rating : 1.5A

Material:
 Housing: Thermoplastic UL 94V-0
 Contact : Selective Gold Plating
 Terminal: 0.35mm Thickness Phosphor Bronze
 Plated With Gold And Tin In Solder Area.
 CUL File No : E215573

PART NO : 8 3 8 6 C - B * 1 S

Positions
 Contacts
 Housing Color
 B : Black

For RJ11
 Ports
 Gold Plated
 0 : Gold Flash
 1 : 6u"
 2 : 15u"
 3 : 30u"
 4 : 50u"

CHAMPWAY 冠泰電子有限公司
 CHAMPWAY ELECTRONICS CO., LTD.

ZONE	REV.	DESCRIPTION	DATE	APPD.	FILE NO : 83 (SERIES)	TITLE 圖 名	NON-SHIELDED RJ11 SIDE ENTRY PCB JACK			UNIT 單位	mm inch
Ⓐ	A.1	Withstand Voltage 500修改為1000VAC	2008-08-01	Nick	TOLERANCE(公差): 0.000 mm ± 0.075 mm 0.00 mm ± 0.15 mm 0.0 mm ± 0.25 mm	PART NO. 料 號	8386C-B * 1S			SCALE 比 例	1 : 1
Ⓑ						REV. 版 本	A.1	DATE 日 期	2007-07-17		
Ⓒ						CHECKED BY 審 核	Michael		DRAWN BY 製 圖	Valiant	
Ⓓ											
Ⓔ											