
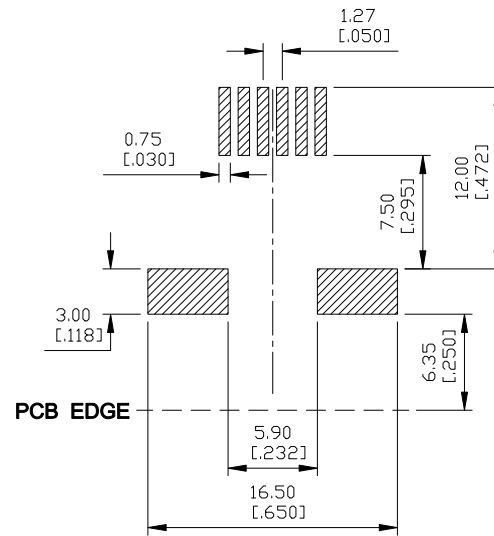
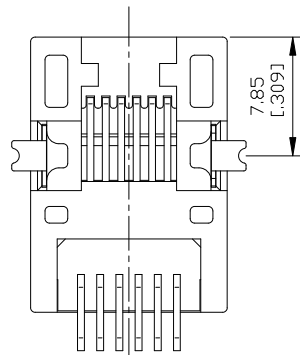



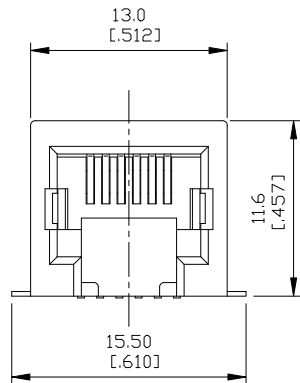

**SUGGESTED PCB LAYOUT
TOP VIEW**

Electrical Characteristics :

Insulation Resistance : 500MΩ Min.

Contact Resistance : 50mΩ Max.

Withstand Voltage : 1000 VAC 1 minute.

Current Rating : 1.5A

Material:

Housing: Nylon With Glass Fiber, UL 94V-0

Contact : Selective Gold Plating

Terminal: 0.35mm Thickness Phosphor Bronze
Plated With Gold And Tin In Solder Area.

Plank: Brass , Nickel Plating

CUL File No : E215573

PART NO : 8 5 6 6 A - B * 1

Positions →
Contacts →
Housing Color →
B : Black

Ports →
Gold Plated
0 : Gold Flash
1 : 6u"
2 : 15u"
3 : 30u"
4 : 50u"

CHAMPWAY 冠泰電子有限公司
CHAMPWAY ELECTRONICS CO., LTD.

ZONE	REV.	DESCRIPTION	DATE	APPD.	FILE NO : 85 (SERIES)	TITLE 圖 名	RJ11 SMT SIDE ENTRY PCB JACK			UNIT 單位	mm inch
Ⓐ	A.1	Withstand Voltage 500修改為1000VAC	2008-08-01	Nick	TOLERANCE(公差) : 0.000 mm ± 0.075mm 0.00 mm ± 0.15mm 0.0 mm ± 0.25mm	DWG NO. 圖 號	8566A-B * 1			SCALE 比 例	1 : 1
Ⓑ						REV. 版 本	A.1	DATE 日 期	2007-01-29		
Ⓒ						CHECKED BY 審 核	Aaron			DRAWN BY 製 圖	Michael
Ⓓ											
Ⓔ											