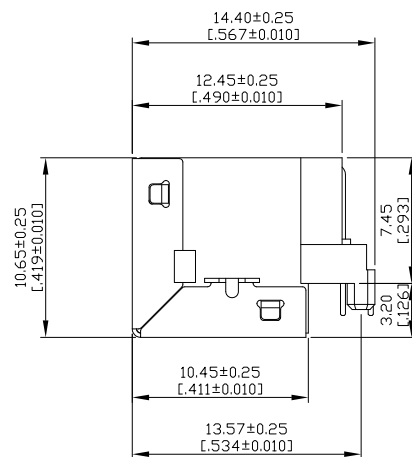
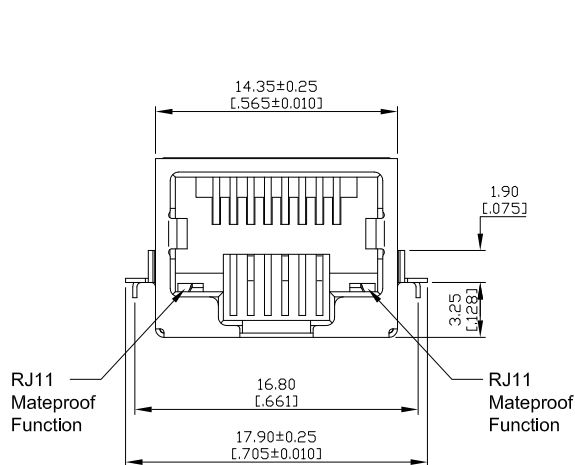


Electrical Characteristics :
 Insulation Resistance : 100M Ω Min.
 Contact Resistance : 50m Ω Max.
 Withstand Voltage : 500 VAC 1 minute.
 Current Rating : 1.0A



Material:
 Housing : Thermoplastic UL94V-0
 Contact : Selective Gold Plating.
 Terminal: 0.3mm Thickness Phosphor Bronze,
 Tin Plated on the Solder Area.
 (A). Shield : SUS, Tin Plated on the Solder Area.

CUL File No : E215573

PART NO : 3 0 8 8 A - B * 1 0

Positions
 Contacts
 Housing Color
 B : Black

Ports
 Gold Plated
 0 : Gold Flash
 1 : 6u"
 2 : 15u"
 3 : 30u"
 4 : 50u"

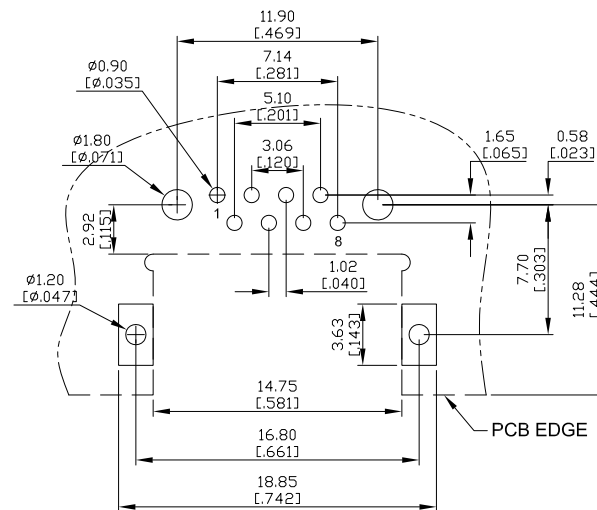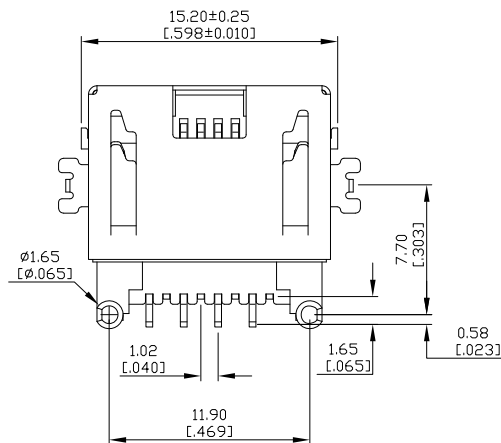

RECOMMENDED PCB LAYOUT
 TOP VIEW

CHAMPWAY 冠泰電子有限公司
 CHAMPWAY ELECTRONICS CO., LTD.

ZONE	REV.	DESCRIPTION	DATE	APPD.	FILE NO : 30 (SERIES)	TITLE 圖 名	RJ45, 8P8C, Offset Type, Partial Shielded, RJ11 Mateproof Function		UNIT 單位	mm inch
(A)	A.1	外殼材質由黃銅改為SUS	2009.03.20	Aaron	TOLERANCE (公差) : 0.000 mm ± 0.075 mm 0.00 mm ± 0.15 mm 0.0 mm ± 0.25 mm	PART NO. 料 號	3088A-B * 10		SCALE 比例	1 : 1
(B)						REV. 版本	A.1	DATE 日期	2009-03-11	
(C)						CHECKED BY 審 核	Michael		DRAWN BY 製 圖	Michael
(D)										
(E)										