

Electrical Characteristics :

Insulation Resistance : 500M Ω Min.

Contact Resistance : 30m Ω Max.

Withstand Voltage : 1000 VAC 1 minute.

Current Rating : 1.5A

Material:

Housing : Thermoplastic UL94V-0

Contact : Selective Gold Plating

Spring Wire : Dia 0.45mm Phosphor Bronze

Optional Gold Plating Over Nickel



Shield : Brass, Nickel Plating.

CUL File No : E215573

PART NO : 8 5 0 8 U - B * 8 * - *

Positions
Contacts
Housing Color
B : Black

Gold Plated
0 : Gold Flash
1 : 6u"
2 : 15u"
3 : 30u"
4 : 50u"

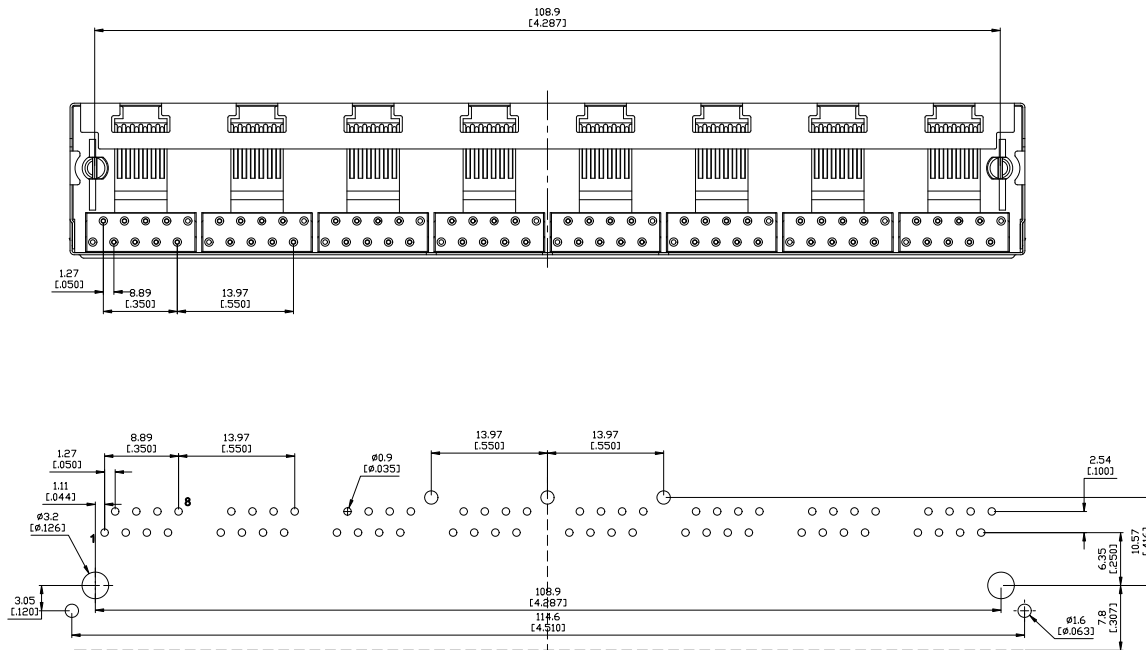

PCB EDGE

**SUGGESTED PCB LAYOUT
TOP VIEW**

CHAMPWAY 冠泰電子有限公司
CHAMPWAY ELECTRONICS CO., LTD.

ZONE	REV.	DESCRIPTION	DATE	APPD.	FILE NO : 85 (SERIES)	TITLE 圖 名	SHIELDED RJ45 SIDE ENTRY PCB JACK			UNIT 單位	mm inch
Ⓐ	A.1	Withstand Voltage 500修改為1000VAC	2008-08-01	Nick	TOLERANCE (公差) : 0.000 mm ± 0.075 mm 0.00 mm ± 0.15 mm 0.0 mm ± 0.25 mm	PART NO. 料 號	8508U-B * 81- 3			SCALE 比 例	1 : 1
Ⓑ						REV. 版 本	A.1	DATE 日 期	2007-08-16		
Ⓒ						CHECKED BY 審 核	Michael			DRAWN BY 製 圖	David
Ⓓ											
Ⓔ											