

NOTE

1. RATING : DC 12V 50mA
2. CONTACT RESISTANCE : 100mΩ MAX
3. GENERAL TOLERANCE : $\pm 0.2\text{mm}$
4. MANUFACTURING SPECIFICATION
WOULD BE ACCORDANCE WITH WT0158
5. PART NO.(P/N.):

TS401VM - * * * R - R

4.5X4.5
VERTICAL


PACKING
R=REEL

OPERATING FORCE
A=100gf
B=160gf
C=260gf




DIMENSION "H"
038=3.8mm
043=4.3mm
048=4.8mm
050=5.0mm
060=6.0mm
070=7.0mm
080=8.0mm
095=9.5mm

STEM COLOR
□=BLACK
R=RED


TS401VM-095xR-R	9.5 mm
TS401VM-080xR-R	8.0 mm
TS401VM-070xR-R	7.0 mm
TS401VM-060xR-R	6.0 mm
TS401VM-050xR-R	5.0 mm
TS401VM-048xR-R	4.8 mm
TS401VM-043xR-R	4.3 mm
TS401VM-038xR-R	3.8 mm
MODEL NO.	"H"



CIRCUIT DIAGRAM

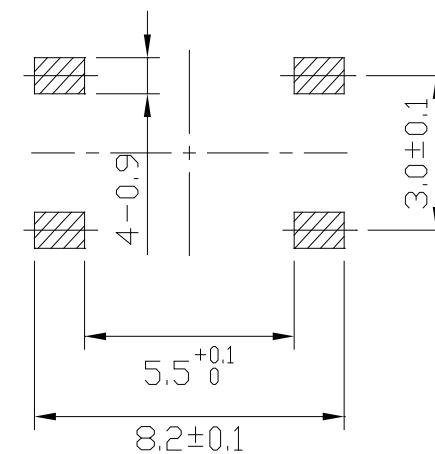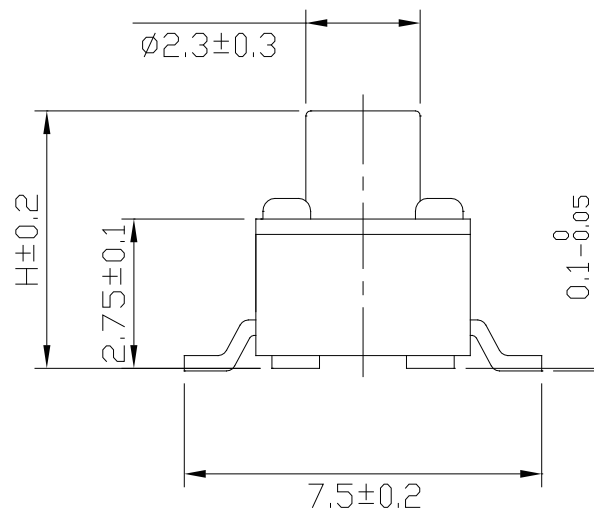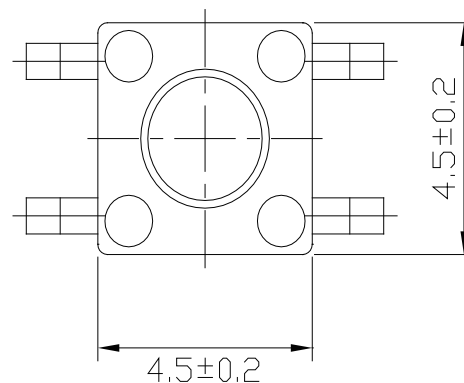

P.C.B LAND DIMENSION

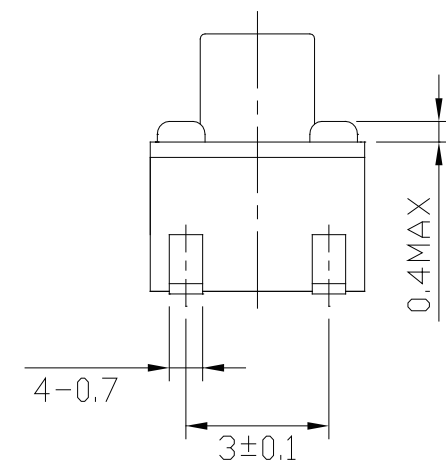

Designed by	L.Y.D						
Checked by			冠泰電子有限公司 CHAMPWAY ELECTRONICS CO., LTD.				
Approved by		Unit	mm	Scale	1/1	Date	2011.10.14
Item	Tactile Switch	Tool	A-Cad	Sheet	1/1	Rev.	0
Model	4.5X4.5 SMT	Drawing name		TS401VM-***BR-R			